


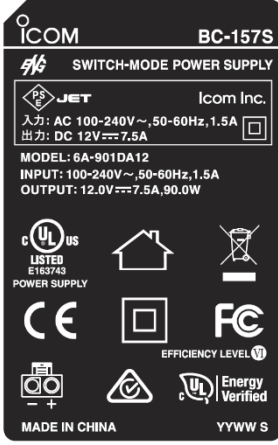
Date : 01.Dec.2020

Icom Inc.

1-1-32 Kamiminami, Hirano-ku, Osaka, 547-0003, Japan

Model Name: BC-157S

| Version and Label  | Items                        | Values   |
|--|------------------------------|--|
|  <p>BC-157S #43 EUR-05</p> | Manufacture                  | ENG Electric Co., Ltd.   |
|  | Address                      | 5F, No.536, Sec 1, MinSheng N. Rd., Gueishan Township, County 33393, Taiwan, (R.O.C) |
|  | Model Name of Manufacture    | 6A-901DA12   |
|  | Input Voltage                | 100 – 240 V AC   |
|  | Input AC frequency           | 50 – 60 Hz   |
|  | Output Voltage               | 12.0 V DC  |
|  | Output Current               | 7.5 A  |
|  | Output Power                 | 90 W   |
|  | Average active efficiency    | 89.89%   |
|  | Efficiency at low load (10%) | 90.41%   |
|  | No-load power consumption    | 0.112 W  |

| Version and Label   | Items                        | Values   |
|---|------------------------------|--|
|  <p>BC-157S #48 EUR-06</p> | Manufacture                  | ENG Electric Co., Ltd.   |
|   | Address                      | 5F, No.536, Sec 1, MinSheng N. Rd., Gueishan Township, County 33393, Taiwan, (R.O.C) |
|   | Model Name of Manufacture    | 6A-901DA12   |
|   | Input Voltage                | 100 – 240 V AC   |
|   | Input AC frequency           | 50 – 60 Hz   |
|   | Output Voltage               | 12.0 V DC  |
|   | Output Current               | 7.5 A  |
|   | Output Power                 | 90 W   |
|   | Average active efficiency    | 89.89%   |
|   | Efficiency at low load (10%) | 90.41%   |
|   | No-load power consumption    | 0.112 W  |